




401-2320-UNV

Brand Name	Jefferson Electric
Starting Type	Instant Start
Input Voltage	120-277V
Input Frequency	50/60 HZ
Open Circuit Voltage	600 Volts

LAMP QTY	LAMP TYPE	RATED LAMP (W)	VOLTS	INPUT CURRENT (A)	INPUT POWER (W)	P.F. ≥	B.F.	B.E.F	THD ≤	C.F. <	MIN START TEMP.
2	F32T8	32	120	0.49	58	0.98	0.88	1.51	10%	1.7	0° F
2	F32T8	32	277	0.22	57	0.98	0.88	1.51	10%	1.7	0° F
1	F32T8	32	120	0.30	36	0.98	0.96	2.74	10%	1.7	0° F
1	F32T8	32	277	0.14	36	0.95	0.98	2.74	10%	1.7	0° F
2	F25T8	25	120	0.18	46	0.98	0.90	1.08	10%	1.7	0° F
2	F25T8	25	277	0.18	46	0.98	0.90	1.08	10%	1.7	0° F
1	F25T8	25	120	0.24	39	0.98	1.00	1.95	15%	1.7	0° F
1	F25T8	25	277	0.11	29	0.98	1.00	1.95	10%	1.7	0° F
2	F17T8	17	120	0.28	33	0.98	0.88	3	10%	1.7	0° F
2	F17T8	17	277	0.13	32	0.95	0.86	3	15%	1.7	0° F
1	F40T8	40	120	0.36	43	0.98	1.00	2.24	10%	1.7	0° F
1	F40T8	40	277	0.16	42	0.98	1.05	2.24	10%	1.7	0° F

Standard Lead Lengths					Shipping Data	
Wires UL1452, 18AWG, Min. Rated 600V, 90°C						
RED	BLUE	BLACK	WHITE	YELLOW	PIECES PER PALLET	GW PER PALLET
15"	15" x 2	15"	15"		1150	1330 Lb.

Case

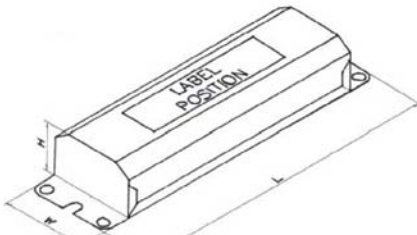

Unit Size & Weight

CASE	LENGTH	WIDTH	HEIGHT	WEIGHT
M	9.50"	1.30"	1.00"	1.1 lbs.

Label

401-2320-UNV
Instant Start
Input: 120-277V
0.46/0.20A, 50/60HZ

For (1) or (2) F32T8 32W Lamp or
(1) or (2) F25T8 25W Lamp or
(1) or (2) F17T8 17W Lamp or
1 F40T8 40W Lamp

Made in China

For one lamp application, cap any bike
lead and insulate to 600 volts.
Ballast case must be grounded.

UL LISTED 24A5

- ▶ NO PCB'S, CLASS P
- ▶ MEETS FCC 18 NON-CONSUMER
- ▶ INHERENT THERMAL PROTECTION
- ▶ HIGH PF (>0.97)
- ▶ MIN STARTING TEMP: 0°F

TYPE 1 OUTDOOR
SOUND RATING Δ
THD: < 10%
O.C.V. = 600 V

WARNING: Install in accordance with National & Local Electrical Codes. Disconnect line voltage before installing or replacing ballast.