




401-2590-UNV	
Brand Name	Jefferson Electric
Starting Type	Instant Start
Input Voltage	120-277
Input Frequency	50/60 HZ
Open Circuit Voltage	600 Volts

LAMP QTY	LAMP TYPE	RATED LAMP (W)	VOLTS	INPUT CURRENT (A)	INPUT POWER (W)	P.F. \geq	B.F.	B.E.F	THD \leq	C.F. $<$	MIN START TEMP.
2	F96T8	59	120	0.94	108	0.99	0.88	0.81	10%	1.7	32° F
2	F96T8	59	277	0.40	106	0.98	0.88	0.83	10%	1.7	32° F
1	F96T8HO	86	120	0.77	92	0.99	1.05	1.14	10%	1.7	32° F
1	F96T8HO	86	277	0.33	91	0.98	1.05	1.15	10%	1.7	32° F
1	F96T8	59	120	0.57	68	0.99	1.09	1.60	10%	1.7	32° F
1	F96T8	59	277	0.25	67	0.98	1.09	1.62	10%	1.7	32° F

	Standard Lead Lengths					Shipping Data	
	Wires UL1452, 18AWG, Min. Rated 600V, 90°C					PIECES PER PALLET	GW PER PALLET
	RED	BLUE	BLACK	WHITE	YELLOW		
DISTRIBUTOR	15"	15" x 2	15"	15"		1000	1250 Lb.

Case

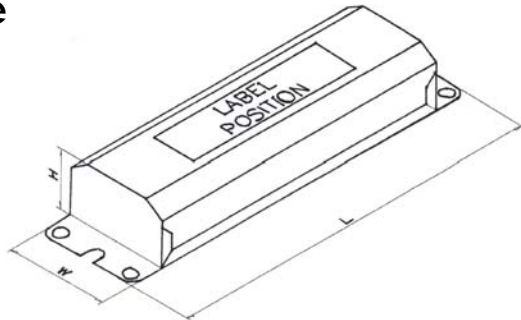

Unit Size & Weight

CASE	LENGTH	WIDTH	HEIGHT	WEIGHT
M	9.50"	1.30"	1.00"	1.20 Lb.

Meets ANSI Standard C82.11-2005
 Meets ANSI Standard C62.41-2002
 Meets FCC Part 18 None Consumer Limits
 UL & cUL Listed Class P, Type 1 Outdoor

Maximum Ambient Temperature: 105 °F/40 °C
 Maximum Case Temperature: 160 °F/70 °C
 Remote Mounting: 18 foot maximum, 18 AWG