


Jefferson Electric

ENCAPSULATED TRANSFORMERS

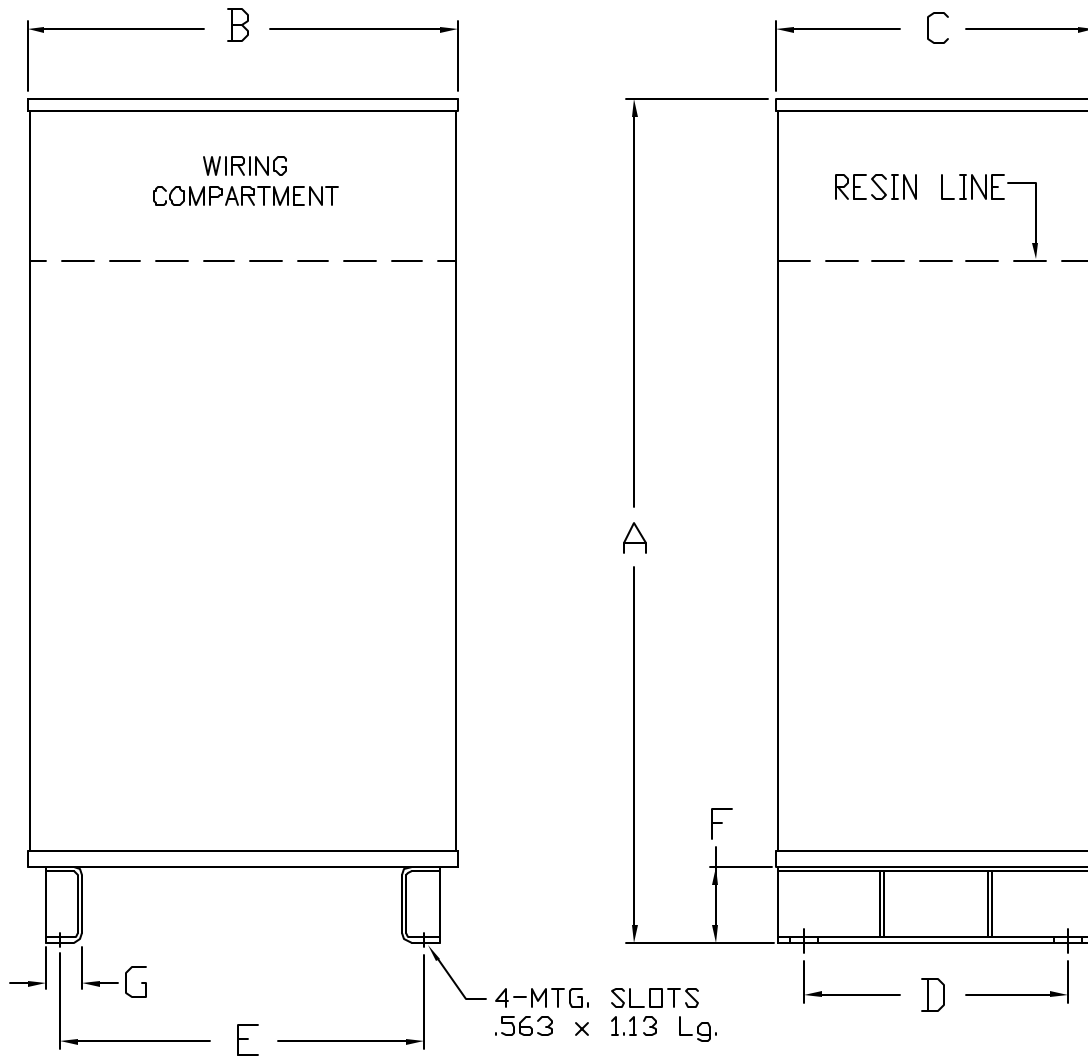

KVA	TEMP. RISE C°	NET WT. LBS.	HOUSING DIMENSIONS										
			A	B	C	D	E	F	G				
30	135	875	37.00	25.25	12.75	10.50	22.50	3.00	1.50				
45	135	980	37.00	25.25	12.75	10.50	22.50	3.00	1.50				
75	135	1100	37.00	25.25	12.75	10.50	22.50	3.00	1.50				

NOTES:

1. ALL UNITS ARE UL LISTED AND DESIGNED IN ACCORDANCE WITH ANSI, NEMA, AND CSA STANDARDS.
2. THESE TRANSFORMERS UTILIZE A UL RECOGNIZED 180°C INSULATION SYSTEM, TEMPERATURE RISE AS INDICATED IN THE TABLE.
3. TRANSFORMERS ARE ENCAPSULATED WITH ELECTRICAL GRADE RESIN IN A NEMA 3R-RATED ENCLOSURE, BUILT IN ACCORDANCE WITH NEMA, ANSI, UL, AND CSA STANDARDS.
4. PAINT COLOR IS ANSI #61 GRAY.



GENERAL PURPOSE TRANSFORMERS
THREE-PHASE, 600 VOLTS CLASS, 60 HZ.
ALUMINUM WINDING ENCAPSULATED

PCD 413-FIGURE-21

REV.
A